


## 2. Primitive Types, Strings, and Console I/O

Prof. Dr. Harald Gall  
Institut für Informatik  
Universität Zürich  
<http://seal.ifi.uzh.ch>



---

---

---

---

---

---

---

---

### Objectives

- become familiar with Java primitive types (numbers, characters, etc.)
- learn about assignment statements and expressions
- learn about strings
- become familiar with classes, methods, and objects



2

---

---

---

---

---

---

---

---

### Objectives, cont.

- learn about simple keyboard input and screen output
- learn about windows-based input and output using the `JOptionPane` class



© 2005 W. Savitch, Pearson Prentice Hall

3

---

---

---

---

---

---

---

---

## Outline

- Primitive Types and Expressions
- The Class `String`
- Keyboard and Screen I/O
- Documentation and Style
- Graphics Supplement

---

---

---

---

---

---

---

---

## Prerequisite

- familiarity with the notions of *class*, *method*, and *object*

---

---

---

---

---

---

---

---

## Primitive Types and Expressions: Outline

Variables  
Java Identifiers  
Primitive Types  
Assignment Statements  
Specialized Assignment Operators  
Simple Screen Output  
Simple Input

---

---

---

---

---

---

---

---

## Primitive Types and Expressions: Outline, cont.

Number Constants  
Assignment Compatibilities  
Type Casting  
Arithmetic Operations  
Parentheses and Precedence Rules  
Increment and Decrement Operators

---

---

---

---

---

---

---

---

## Variables and Values

- *Variables* store data such as numbers and letters
  - They are places to store data
  - They are implemented as memory locations
- The data stored by a variable is called its *value*
  - The value is stored in the memory location
- Its value can be changed

---

---

---

---

---

---

---

---

## Variables and Values, cont.

- `class EggBasket` (page 50)

---

---

---

---

---

---

---

---

## Variables and Values, cont.

- variables

```
numberOfBaskets  
eggsPerBasket  
totalEggs
```

- assigning values

```
eggsPerBasket = 6;  
eggsPerBasket = eggsPerBasket - 2;
```

---

---

---

---

---

---

---

---

## Naming and Declaring Variables

- Choose names that are helpful such as `count` or `speed`, but not `c` or `s`

- When you declare a variable, you provide its name and type

```
int numberOfBaskets, eggsPerBasket;
```

- A variable's type determines what kinds of values it can hold (`int`, `double`, `char`, etc.)
- A variable must be declared before it is used

---

---

---

---

---

---

---

---

## Syntax and Examples

- syntax

```
type variable_1, variable_2, ...;  
(variable_1 is a generic variable called a syntactic variable)
```

- examples

```
int styleChoice, numberOfChecks;  
double balance, interestRate;  
char jointOrIndividual;
```

---

---

---

---

---

---

---

---

## Types in Java

- A *class type* is used for a class of objects and has both data and methods.
  - "Frankie goes to Hollywood" is a value of class type `String`
- A *primitive type* is used for simple, nondecomposable values such as an individual number or individual character.
  - `int`, `double`, and `char` are primitive types.

---

---

---

---

---

---

---

---

## Naming Conventions

- Class types begin with an uppercase letter (e.g. `String`).
- Primitive types begin with a lowercase letter (e.g. `int`).
- Variables of both class and primitive types begin with a lowercase letters (e.g. `myName`, `myBalance`).
  - Multiword names are "punctuated" using uppercase letters (= CamelCase).

---

---

---

---

---

---

---

---

## Where to Declare Variables

- Declare a variable
  - just before it is used or
  - at the beginning of the section of your program that is enclosed in `{}`.

```
public static void main(String[] args) {  
    /* declare variables here */  
    int numberOfBaskets, eggsPerBasket, totalEggs;
```

---

---

---

---

---

---

---

---

## Java Identifiers

- An *identifier* is a name, such as the name of a variable
- Identifiers may contain only
  - letters
  - digits (0 through 9)
  - the underscore character (`_`)
  - and the dollar sign symbol (`$`) which has a special meaningbut the first character cannot be a digit

---

---

---

---

---

---

---

---

## Java Identifiers, cont.

- identifiers may not contain any spaces, dots (`.`), asterisks (`*`), or other characters:  
`7-11 netscape.com util.*` (not allowed)
- Identifiers can be arbitrarily long
- Since Java is *case sensitive*, `stuff`, `Stuff`, and `STUFF` are different identifiers

---

---

---

---

---

---

---

---

## Grammatik / EBNF

- Grammatik: Regeln zur exakten Definition einer "korrekten" Schreibweise
  - Missverständnisse ausschließen: Grammatik formal verfassen
  - Kein Interpretationsspielraum: Text ist entweder "richtig" oder "falsch"
- Gegensatz zu natürlichen Sprachen:
  - keine formale Grammatik, keine exakte Abgrenzung richtig/falsch
- Populäre Schreibweise: "Extended Backus-Naur Form" (EBNF)
  - Liste von **Produktionen** = Ersetzungsregeln
  - Jede Produktion:
    - Linke Seite = Platzhalter, Variable, **Nichtterminal**
    - Rechte Seite = Folge von Symbolen, durch die die linke Seite ersetzt werden kann
  - Symbol: Nichtterminal oder **Terminal**, letzteres kann nicht mehr ersetzt werden

---

---

---

---

---

---

---

---

## Metasymbole der EBNF

⇒	trennt linke und rechte Seite
(...)	gruppiert Symbolfolgen
[...]	Option, geklammerte Symbole dürfen auch weggelassen werden
*	beliebige Wiederholung (auch null-mal)
+	ein- oder mehrmalige Wiederholung
	trennt Alternativen

Beispiel: Grammatik für ganzzahlige Numerale:

*sign* ⇒ "+" | "-"

*digit* ⇒ "0" | ... | "9"

*numeral* ⇒ [*sign*] *digit*+

---

---

---

---

---

---

---

---

## Keywords or Reserved Words

- Words such as `if` are called *keywords* or *reserved words* and have special, predefined meanings
- Keywords cannot be used as identifiers
- See Appendix 1 for a complete list of Java keywords
- other keywords: `int`, `public`, `class`

---

---

---

---

---

---

---

---

## Primitive Types

- four integer types: `byte`, `short`, `int`, and `long`
  - `int` is most common
- two floating-point types: `float` and `double`
  - `double` is more common
- one character type: `char`
- one boolean type: `boolean`

---

---

---

---

---

---

---

---

## Primitive Types, cont.

Type Name	Kind of Value	Memory Used	Size Range
byte	integer	1 byte	-128 to 127
short	integer	2 bytes	-32768 to 32767
int	integer	4 bytes	-2147483648 to 2147483647
long	integer	8 bytes	-9223372036854775808 to 9223372036854775807
float	floating-point number	4 bytes	$\pm 3.40282347 \times 10^{+38}$ to $\pm 1.40239846 \times 10^{-45}$
double	floating-point number	8 bytes	$\pm 1.76769313486231570 \times 10^{+308}$ to $\pm 4.94065645841246544 \times 10^{-324}$
char	single character (Unicode)	2 bytes	all Unicode characters
boolean	true or false	1 bit	not applicable

Display 2.2  
Primitive Types

---

---

---

---

---

---

---

---

## Examples of Primitive Values

### integer types

0 -1 365 12000

### floating-point types

0.99 -22.8 3.14159 5.0

### character type

'a' 'A' '#' ' ' '\'

### boolean type

true false

---

---

---

---

---

---

---

---

## Assignment Statements

- An assignment statement is used to assign a value to a variable.

```
answer = 42;
```

- The “equal sign” is called the *assignment operator*.

- We say:

“The variable named `answer` is assigned a value of 42,” or more simply, “`answer` is assigned 42.”

---

---

---

---

---

---

---

---



## Assignment Statements, cont.

- Syntax
  - `variable = expression`
- EBNF
  - `assignment`  $\Rightarrow$  `identifier "=" expression ";"`
  - where expression can be another variable, a literal or constant (such as a number), or something more complicated which combines variables and literals using operators (such as + and -)

---

---

---

---

---

---

---

---

## Assignment Examples

```
amount = 3.99;  
firstInitial = 'W';  
score = numberOfCards + handicap;  
eggsPerBasket = eggsPerBasket - 2;
```

---

---

---

---

---

---

---

---

## Assignment Evaluation

- The expression on the **right-hand side** of the assignment operator (=) is **evaluated first**.
- The result is used to set the value of the variable on the **left-hand side** of the assignment operator.

```
score = numberOfCards + handicap;  
eggsPerBasket = eggsPerBasket - 2;
```

---

---

---

---

---

---

---

---

## Specialized Assignment Operators

- Assignment operators can be combined with arithmetic operators (including -, \*, /, and %).

```
amount = amount + 5;
```

can be written as

```
amount += 5;
```

yielding the same results.

---

---

---

---

---

---

---

---

## Simple Screen Output

```
System.out.println("The count is " + count);
```

outputs the string literal "The count is " followed by the current value of the variable `count`.

---

---

---

---

---

---

---

---

## Simple Input

- Sometimes the data needed for a computation are obtained from the user at run time.
- Keyboard input requires

```
import java.util.*
```

at the beginning of the file.

---

---

---

---

---

---

---

---

## Simple Input, cont.

- Data can be entered from the keyboard using  

```
Scanner keyboard =  
    new Scanner(System.in);
```

followed, for example, by  

```
eggsPerBasket = keyboard.nextInt();
```

which reads one `int` value from the keyboard and assigns it to `eggsPerBasket`

---

---

---

---

---

---

---

---

## Simple Input, cont.

### class EggBasket2

```
import java.util.Scanner;

public class EggBasket2 {
    public static void main(String[] args) {
        int numberOfBaskets, eggsPerBasket, totalEggs;
        Scanner keyboard = new Scanner(System.in);
        System.out.println("Enter the number of eggs in each basket:");
        eggsPerBasket = keyboard.nextInt();
        numberOfBaskets = keyboard.nextInt();
        totalEggs = numberOfBaskets * eggsPerBasket;
        System.out.println("If you have");
        System.out.println(eggsPerBasket + " eggs per basket and");
        System.out.println(numberOfBaskets + " baskets, then");
        System.out.println("the total number of eggs is " + totalEggs);
        System.out.println("Now we take two eggs out of each basket.");
        eggsPerBasket = eggsPerBasket - 2;
        totalEggs = numberOfBaskets * eggsPerBasket;
        System.out.println("You now have");
        System.out.println(eggsPerBasket + " eggs per basket and");
        System.out.println(numberOfBaskets + " baskets.");
        System.out.println("The new total number of eggs is " + totalEggs);
    }
}
```

Sample Screen Dialog

```
Enter the number of eggs in each basket:
6
Enter the number of baskets:
10
If you have
6 eggs per basket and
10 baskets, then
the total number of eggs is 60
Now we take two eggs out of each basket.
You now have
4 eggs per basket and
10 baskets.
The new total number of eggs is 40
```

---

---

---

---

---

---

---

---

## Number Constants

- Literal expressions such as `2`, `3.7`, or `'y'` are called *constants*
- Integer constants can be preceded by a `+` or `-` sign, but cannot contain commas
- Floating-point constants can be written
  - with digits after a decimal point or
  - using *e notation*, also called *scientific notation* or *floating-point notation*
- Examples
  - `865000000.0` can be written as `8.65e8`
  - `0.000483` can be written as `4.83e-4`
- The number in front of the `e` does not need to contain a decimal point

---

---

---

---

---

---

---

---

## Assignment Compatibilities

- Java is said to be *strongly typed*
  - You can't, for example, assign a floating point value to a variable declared to store an integer.
- Sometimes conversions between numbers are possible.

```
doubleVariable = 7;
```

is possible even if `doubleVariable` is of type `double`, for example.

---

---

---

---

---

---

---

---

## Assignment Compatibilities cont.

- A value of one type can be assigned to a variable of any type further to the right
  - `byte --> short --> int --> long`
  - `--> float --> double`
  - but not to a variable of any type further to the left.
- You can assign a value of type `char` to a variable of type `int`

---

---

---

---

---

---

---

---

## Floatingpoint

- "Gleitkommazahlen", "Fließkommazahlen"
- Bezeichnung mit reserviertem Wort `"double"`, gleichberechtigt zu `"int"`

*f*numerical  $\Rightarrow$  *[sign] digit+ "." digit\* [exponent] [doublesuffix]*

*f*numerical  $\Rightarrow$  *[sign] "." digit+ [exponent] [doublesuffix]*

*f*numerical  $\Rightarrow$  *[sign] digit+ exponent [doublesuffix]*

*f*numerical  $\Rightarrow$  *[sign] digit+ doublesuffix*

*e*xponent  $\Rightarrow$  *("E" | "e") [sign] digit+*

*d*oublesuffix  $\Rightarrow$  *"D" | "d"*

- Typ einer Variable bei der Definition festgelegt:

```
int i;  
double d;  
final double pi = 3.1415926
```

---

---

---

---

---

---

---

---

## int vs. double

- Floatingpoint-Arithmetik rechnerisch viel genauer, wozu noch ganzzahlige Arithmetik?
- int-Arithmetik wichtig weil...
  - int ist schneller
  - double braucht mehr Platz
  - int immer exakt, double nicht
- Beispiel:
  - $(1.0/x)*x - 1.0$  liefert nicht immer null
- int wenn möglich
- double wenn es die Aufgabe erfordert

---

---

---

---

---

---

---

---

## Implizite Typkonversion int → double

- Zwei Operanden gleichen Typs:
  - Operandentyp = Ergebnistyp
- Gemischte Operandentypen:
  - double ist Ergebnistyp
    - $1 + 2 \rightarrow 3$  (int)
    - $1.0 + 2 \rightarrow 3.0$  (double)
    - $1 + 2.0 \rightarrow 3.0$  (double)
    - $1.0 + 2.0 \rightarrow 3.0$  (double)
- Automatische Typumwandlung int → double:  
"implizite Typkonversion"  
Keine implizite Typkonversionen double → int

---

---

---

---


---

---

---

---

## Legale Konvertierungen

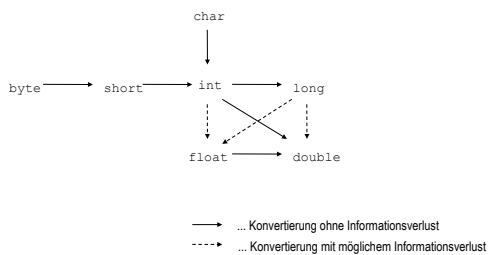

---

---

---

---

---

---

---

---

## Implizite Konvertierungen

- Werden 2 Werte durch einen binären Operator verknüpft:
  - Ist einer der Operanden
    - ein double, so wird der andere zu double konvertiert,
    - ein float, so wird der andere zu float konvertiert,
    - ein long, so wird der andere zu long konvertiert
    - anderenfalls beide zu int konvertiert werden
  - bevor die Operation ausgeführt wird (*implicit type conversion*)

---

---

---

---

---

---

---

---

## float and double Literale

- Scientific notation:
  - 98.6, 986e-1, 0.986e2, 9.86e1
- Um float von double zu unterscheiden, muss der Literal ein "f" am Schluss stehen haben
  - 3.14159f
- Das gleiche gilt für double Werte. Um sie von int Werten zu unterscheiden hängt man ein "d" an.
  - 98d

---

---

---

---

---

---

---

---

## Benutzung von float und double

```
int j = 12223334444;  
float x = 12223334444.0f;  
  
System.out.println("j = " + j);  
System.out.println("x = " + x);  
j = j + 1;  
x = x + 1.0;  
System.out.println("j = " + j);  
System.out.println("x = " + x);
```

Output:

```
j = 1222333444  
x = 1.22233344E9  
j = 1222333445  
x = 1.22233344E9
```

---

---

---

---

---

---

---

---

## Implementation

```
public double convertFeetToMeters(double feet) {  
    return feet * 0.3048;  
}
```

```
public static final double METERSPERFOOT = 0.3048;
```

- **Besser:**  
return feet \* METERSPERFOOT;

---

---

---

---

---

---

---

---

## Type Casting

- A *type cast* temporarily changes the value of a variable from the declared type to some other type.

- For example,  
double distance;  
distance = 9.0;  
int points;  
points = (int)distance;  
(illegal without (int))

---

---

---

---

---

---

---

---

## Type Casting, cont.

- The value of (int)distance is 9, but the value of distance, both before and after the cast, is 9.0.
- Any nonzero value to the right of the decimal point is *truncated* rather than *rounded*.

---

---

---

---

---

---

---

---

## Initializing Variables

- A variable that has been declared, but no yet given a value is said to be *uninitialized*.
- Uninitialized class variables have the value `null`.
- Uninitialized primitive variables may have a default value.
- It's good practice not to rely on a default value.

---

---

---

---

---

---

---

---

## Initializing Variables, cont.

- To protect against an uninitialized variable (and to keep the compiler happy), assign a value at the time the variable is declared.
- Examples:

```
int count = 0;  
char grade = 'A';
```

---

---

---

---

---

---

---

---

## Initializing Variables, cont.

- Syntax

```
type variable_1 = expression_1, variable_2 =  
expression_2, ...;
```

---

---

---

---

---

---

---

---



## Imprecision in Floating-Point Numbers

- Floating-point numbers often are only approximations since they are stored with a finite number of bits.
- Hence  $1.0/3.0$  is slight less than  $1/3$ .
- $1.0/3.0 + 1.0/3.0 + 1.0/3.0$  is less than 1.

---

---

---

---

---

---

---

---

## Arithmetic Operations

- Arithmetic expressions can be formed using the  $+$ ,  $-$ ,  $*$ , and  $/$  operators together with variables or numbers referred to as *operands*.
  - When both operands are of the same type, the result is of that type.
  - When one of the operands is a floating-point type and the other is an integer, the result is a floating point type.

---

---

---

---

---

---

---

---

## Arithmetic Operations, cont.

### ■ Example

If `hoursWorked` is an `int` to which the value 40 has been assigned, and `payRate` is a `double` to which 8.25 has been assigned

```
hoursWorked * payRate
```

is a `double` with a value of 330.0

---

---

---

---

---

---

---

---

## Arithmetic Operations, cont.

- Expressions with two or more operators can be viewed as a series of steps, each involving only two operands.
  - The result of one step produces one of the operands to be used in the next step.
- example

```
balance + (balance * rate)
```

---

---

---

---

---

---

---

---

## Arithmetic Operations, cont.

- if at least one of the operands is a floating-point type and the rest are integers, the result will be a floating point type.
- The result is the rightmost type from the following list that occurs in the expression.

```
byte --> short --> int --> long  
--> float --> double
```

---

---

---

---

---

---

---

---

## The Division Operator

- The division operator ( $/$ ) behaves as expected if one of the operands is a floating-point type.
- When both operands are integer types, the result is truncated, not rounded.
  - Hence,  $99/100$  has a value of 0.

---

---

---

---

---

---

---

---

## The mod Operator

- The `mod (%)` operator is used with operators of integer type to obtain the remainder after integer division
- 14 divided by 4 is 3 *with a remainder of 2*
  - Hence, `14 % 4` is equal to 2
- The mod operator has many uses, including
  - determining if an integer is odd or even
  - determining if one integer is evenly divisible by another integer

---

---

---

---

---

---

---

---

## Parentheses and Precedence

- Parentheses can communicate the order in which arithmetic operations are performed
- examples:  
`(cost + tax) * discount`  
`(cost + (tax * discount))`
- Without parentheses, an expressions is evaluated according to the *rules of precedence*.

---

---

---

---

---

---

---

---

## Precedence Rules

### *Highest Precedence*

First: the unary operators: `+`, `-`, `++`, `--`, and `!`

Second: the binary arithmetic operators: `*`, `/`, and `%`

Third: the binary arithmetic operators: `+` and `-`

### *Lowest Precedence*

Display 2.4

Precedence Rules

---

---

---

---

---

---

---

---

## Precedence Rules, cont.

- The *binary* arithmetic operators  $+$ ,  $/$ , and  $\%$ , have *lower precedence* than the *unary* operators  $+$ ,  $-$ ,  $++$ ,  $--$ , and  $!$ , but have *higher precedence* than the binary arithmetic operators  $+$  and  $-$ .
- When binary operators have equal precedence, the operator on the left acts before the operator(s) on the right.

---

---

---

---

---

---

---

---

## Precedence Rules, cont.

- When unary operators have equal precedence, the operator on the right acts before the operation(s) on the left.
- Even when parentheses are not needed, they can be used to make the code clearer.  

```
balance + (interestRate * balance)
```
- Spaces also make code clearer  

```
balance + interestRate*balance
```

 but spaces do not dictate precedence.

---

---

---

---

---

---

---

---

## Sample Expressions

Ordinary Mathematical Expression	Java Expression (Preferred Form)	Equivalent Fully Parenthesized Java Expression
$rate^2 + delta$	<code>rate*rate + delta</code>	<code>(rate*rate) + delta</code>
$2(salary + bonus)$	<code>2*(salary + bonus)</code>	<code>2*(salary + bonus)</code>
$\frac{1}{time + 3\ mass}$	<code>1/(time + 3*mass)</code>	<code>1/(time + (3*mass))</code>
$\frac{a-7}{t + 9v}$	<code>(a - 7)/(t + 9*v)</code>	<code>(a - 7)/(t + (9*v))</code>

Display 2.5  
Arithmetic Expressions in Java

---

---

---

---

---

---

---

---

## Case Study: Vending Machine Change

- requirements
  - The user enters an amount between 1 cent and 99 cents.
  - The program determines a combination of coins equal to that amount.
  - For example, 55 cents can be two quarters and one nickel.

---

---

---

---

---

---

---

---

## Case Study, cont.

- sample dialog

Enter a whole number from 1 to 99.  
The machine will determine a combination of coins.

**87**  
87 cents in coins:  
3 quarters  
1 dime  
0 nickels  
2 pennies

---

---

---

---

---

---

---

---

## Case Study, cont.

- variables needed

```
int amount, quarters, dimes, nickels, pennies;
```

---

---

---

---

---

---

---

---

## Case Study, cont.

- Algorithm - first version:

1. Read the amount.
2. Find the maximum number of quarters in the amount.
3. Subtract the value of the quarters from the amount.
4. Repeat the last two steps for dimes, nickels, and pennies.
5. Print the original amount and the quantities of each coin.

---

---

---

---

---

---

---

---

## Case Study, cont.

- The algorithm doesn't work properly, because the original amount is changed by the intermediate steps.

- The original value of `amount` is lost.

- Change the list of variables

```
int amount, originalAmount, quarters, dimes,  
    nickles, pennies;
```

- and update the algorithm

---

---

---

---

---

---

---

---

## Case Study, cont.

1. Read the amount.
2. Make a copy of the amount.
3. Find the maximum number of quarters in the amount.
4. Subtract the value of the quarters from the amount.
5. Repeat the last two steps for dimes, nickels, and pennies.
6. Print the original amount and the quantities of each coin.

---

---

---

---

---

---

---

---

## Case Study, cont.

- Write Java code that *implements* the algorithm written in pseudo code

---

---

---

---

---

---

---

---

## Case Study, cont.

- class ChangeMaker

```
import java.util.*;

public class ChangeMaker
{
    public static void main(String[] args)
    {
        int amount, originalAmount,
            quarters, dimes, nickels, pennies;
        System.out.println("Enter a whole number from 1 to 99.");
        System.out.println("I will output a combination of coins.");
        System.out.println("This equals that amount of change.");
        Scanner keyboard = new Scanner(System.in);
        amount = keyboard.nextInt();
        originalAmount = amount;
        quarters = amount/25;
        amount = amount%25;
        dimes = amount/10;
        amount = amount%10;
        nickels = amount/5;
        amount = amount%5;
        pennies = amount;
        System.out.println(originalAmount
            + " cents in coins can be given as:");
        System.out.println(quarters + " quarters");
        System.out.println(dimes + " dimes");
        System.out.println(nickels + " nickels and");
        System.out.println(pennies + " pennies");
    }
}
```

Sample Screen Image

```
Enter a whole number from 1 to 99:
I will output a combination of coins
that equals that amount of change:
87
87 cents in coins can be given as:
3 quarters
3 dimes
0 nickels and
2 pennies
```

---

---

---

---

---

---

---

---

## Case Study, cont.

- How do we determine the number of quarters (or dimes, nickels, or pennies) in an amount?
- There are 2 quarters in 55 cents, but there are also 2 quarters in 65 cents.
- That's because

$$55 / 25 = 2 \text{ and } 65 / 25 = 2$$

---

---

---

---

---

---

---

---

## Case Study, cont.

- How do we determine the remaining amount?
- The remaining amount can be determined using the mod operator

$55 \% 25 = 5$  and  $65 \% 25 = 15$

- and similarly for dimes and nickels
- Pennies are simply `amount % 5`

---

---

---

---

---

---

---

---

## Case Study, cont.

- The program should be tested with several different amounts.
- Test with values that give zero values for each possible coin denomination.
- Test with amounts close to
  - extreme values such as 0, 1, 98 and 99
  - coin denominations, such as 24, 25, and 26.

---

---

---

---

---

---

---

---

## Increment (and Decrement) Operators

- used to increase (or decrease) the value of a variable by 1
- easy to use, important to recognize
- the increment operator  
`count++` OR `++count`
- the decrement operator  
`count--` OR `--count`

---

---

---

---

---

---

---

---



## Increment (and Decrement) Operators

- equivalent operations

- `count++;`
- `++count;`
- `count = count + 1;`
  
- `count--;`
- `--count;`
- `count = count - 1;`

---

---

---

---

---

---

---

---

## Increment (and Decrement) Operators in Expressions

- after executing

```
int m = 4;  
int result = 3 * (++m)  
result has a value of 15 and m has value 5
```

- after executing

```
int m = 4;  
int result = 3 * (m++)  
result has a value of 12 and m has value 5
```

---

---

---

---

---

---

---

---

## The Class String

- We've used constants of type `String` already.  
"Enter a whole number from 1 to 99."
- A value of type `String` is a sequence of characters treated as a single item.

---

---

---

---

---

---

---

---

## Declaring and Printing Strings

- **declaring**

```
String greeting;  
greeting = "Hello!";
```

- **or**

```
String greeting = "Hello!";
```

- **or**

```
String greeting = new String("Hello!");
```

- **printing**

```
System.out.println(greeting);
```

---

---

---

---

---

---

---

---

## Concatenation of Strings

- Two strings are *concatenated* using the + operator.

```
String greeting = "Hello";  
String sentence;  
sentence = greeting + " officer";  
System.out.println(sentence);
```

- Any number of strings can be concatenated using the + operator.

---

---

---

---

---

---

---

---

## Concatenating Strings and Integers

```
String solution;  
solution = "The temperature is " + 72;  
System.out.println (solution);
```

```
> The temperature is 72
```

---

---

---

---

---

---

---

---

## Classes

- A *class* is a type used to produce objects.
- An *object* is an entity that stores data and can take actions defined by *methods*.
- An object of the `String` class stores data consisting of a sequence of characters.
- The `length()` method returns the number of characters in a particular `String` object.

```
int howMany = solution.length()
```

---

---

---

---

---

---

---

---

## Objects, Methods, and Data

- Objects within a class
  - have the same methods
  - have the same kind(s) of data but the data can have different values.
- Primitive types have values, but no methods.

---

---

---

---

---

---

---

---

## String Methods

Method	Description	Example	Method	Description	Example
<code>length()</code>	Returns the length of the string.	<code>String s = "Hello, World!"; int len = s.length();</code>	<code>indexOf()</code>	Returns the index of the first occurrence of the specified character or substring.	<code>String s = "Hello, World!"; int i = s.indexOf('o');</code>
<code>charAt()</code>	Returns the character at the specified index.	<code>String s = "Hello, World!"; char c = s.charAt(0);</code>	<code>indexOf()</code>	Returns the index of the first occurrence of the specified substring.	<code>String s = "Hello, World!"; int i = s.indexOf("World");</code>
<code>substring()</code>	Returns a substring of the string.	<code>String s = "Hello, World!"; String sub = s.substring(0, 5);</code>	<code>indexOf()</code>	Returns the index of the last occurrence of the specified character or substring.	<code>String s = "Hello, World!"; int i = s.lastIndexOf('o');</code>
<code>trim()</code>	Removes leading and trailing spaces.	<code>String s = " Hello, World! "; String t = s.trim();</code>	<code>indexOf()</code>	Returns the index of the first occurrence of the specified substring, starting from the specified index.	<code>String s = "Hello, World!"; int i = s.indexOf("World", 5);</code>
<code>replace()</code>	Replaces a substring with another substring.	<code>String s = "Hello, World!"; String t = s.replace("World", "Universe");</code>	<code>indexOf()</code>	Returns the index of the first occurrence of the specified substring, starting from the specified index, and ending at the specified index.	<code>String s = "Hello, World!"; int i = s.indexOf("World", 5, 10);</code>
<code>replaceAll()</code>	Replaces all occurrences of a substring with another substring.	<code>String s = "Hello, World!"; String t = s.replaceAll("World", "Universe");</code>	<code>indexOf()</code>	Returns the index of the first occurrence of the specified substring, starting from the specified index, and ending at the specified index, and matching the specified regular expression.	<code>String s = "Hello, World!"; int i = s.indexOf("World", 5, 10, ".*");</code>

---

---

---

---

---

---

---

---

## The Method length()

- The method `length()` returns an `int`.
- You can use a call to method `length()` anywhere an `int` can be used.

```
int count = solution.length();  
System.out.println(solution.length());  
spaces = solution.length() + 3;
```

---

---

---

---

---

---

---

---

## Positions in a String

- positions start with 0, not 1.
  - The 'J' in "Java is fun." is in position 0

---

---

---

---

---

---

---

---

## Positions in a String, cont.

- A position is referred to as an *index*.
  - The 'f' in "Java is fun." is at index 9.

The twelve characters in the string "Java is fun." have indices 0 through 11. The index of each character is shown above it.

0	1	2	3	4	5	6	7	8	9	10	11
J	a	v	a		i	s		f	u	n	.

*Note that the blanks and the period count as characters in the string.*

Display 2.8  
String Indices

---

---

---

---

---

---

---

---

## (Not) Changing String Objects

- No methods allow you to change the value of a `String` object.
- But you can change the value of a `String` variable.

```
String pause = "  Hmm  ";           value of pause
pause = pause.trim();              Hmm
pause = pause + "mum!";           Hmmmmmm
pause = "Ahhh";                   Ahhh
```

---

---

---

---

---

---

---

---

## Using the String Class

- class `StringDemo`

```
public class StringDemo
{
    public static void main(String[] args)
    {
        String sentence = "Text processing is hard!";
        int position;
        position = sentence.indexOf("hard");
        System.out.println(sentence);
        System.out.println("The word 'hard' starts at index "
            + position);
        sentence = sentence.substring(0, position) + "easy!";
        System.out.println("The changed string is:");
        System.out.println(sentence);
    }
}
```

### Sample Screen Dialog

```
Text processing is hard!
012345678901234567890123
The word "hard" starts at index 10
The changed string is:
Text processing is easy!
```

The character '\n' is  
absent from all references  
printed to the console  
Character

Monday 2/9  
Using the String Class

---

---

---

---

---

---

---

---

## Escape Characters

- How would you print  
"Java" refers to a language.?
- The compiler needs to be told that the quotation marks (`"`) do not signal the start or end of a string, but instead are to be printed.

```
System.out.println(
    "\\Java\" refers to a language.");
```

---

---

---

---

---

---

---

---

## Escape Characters

```
\\" Double quote.  
\' Single quote.  
\\ Backslash.  
\n New line. Go to the beginning of the next line.  
\r Carriage return. Go to the beginning of the current line.  
\t Tab. Add whitespace up to the next tab stop.
```

Display 2.10

Escape Characters

- Each escape sequence is a single character even though it is written with two symbols.

---

---

---

---

---

---

---

---

## Examples

```
System.out.println("abc\\def");  
abc\def  
System.out.println("new\nline");  
new  
line  
char singleQuote = '\'';  
System.out.println(singleQuote);  
'
```

---

---

---

---

---

---

---

---

## The Unicode Character Set

- Most programming languages use the *ASCII* character set.
- Java uses the *Unicode* character set which includes the *ASCII* character set.
- The Unicode character set includes characters from many different alphabets (but you probably won't use them).

---

---

---

---

---

---

---

---

## Keyboard and Screen I/O: Outline

Screen Output  
Keyboard Input

---

---

---

---

---

---

---

---

## Screen Output

- We've seen several examples of screen output already.
- `System.out` is an object that is part of Java.
- `println()` is one of the methods available to the `System.out` object.

---

---

---

---

---

---

---

---

## Screen Output, cont.

- The concatenation operator (+) is useful when everything does not fit on one line.

```
System.out.println("When everything " +  
"does not fit on one line, use the" +  
" concatenation operator ('+'/'");
```

- Do not break the line except immediately before or after the concatenation operator (+).

---

---

---

---

---

---

---

---

## Screen Output, cont.

- Alternatively, use `print()`

```
System.out.print("When everything ");  
System.out.print("does not fit on ");  
System.out.print("one line, use the ");  
System.out.print("\nprint\n ");  
System.out.println("statement");
```

ending with a `println()`.

---

---

---

---

---

---

---

---

## Screen Output, cont.

- syntax

```
System.out.println(output_1 + output_2 + ... +  
output_n);
```
- example

```
System.out.println (1967 + " " + "Oldsmobile" + " " +  
442);
```

**1967 Oldsmobile 442**

---

---

---

---

---

---

---

---

## Keyboard Input

- Java 5.0 has reasonable facilities for handling keyboard input.
- These facilities are provided by the `Scanner` class in the `java.util` package.
  - A *package* is a library of classes.

---

---

---

---

---

---

---

---



## Using the Scanner Class

- Near the beginning of your program, insert  
`import java.util.*`
- Create an object of the `Scanner` class  
`Scanner keyboard =  
new Scanner (System.in)`
- Read data (an `int` or a `double`, for example)  
`int n1 = keyboard.nextInt();  
double d1 = keyboard.nextDouble();`

---

---

---

---

---

---

---

---

## Keyboard Input Demonstration

- class `ScannerDemo`

```
import java.util.*;

public class ScannerDemo {
    public static void main(String[] args) {
        Scanner keyboard = new Scanner(System.in);
        System.out.println("Enter two whole numbers");
        System.out.println("separated by one or more spaces");
        int i = keyboard.nextInt();
        int j = keyboard.nextInt();
        System.out.println("The entered " + i + " and " + j + " are");
        System.out.println("odd/even");
        double d1 = keyboard.nextDouble();
        System.out.println("The entered " + d1 + " and " + d2);
        System.out.println("next enter two words");
        String s1 = keyboard.next();
        String s2 = keyboard.next();
        System.out.println("The entered " + s1 + " and " + s2);
        System.out.println("next enter a line of text");
        String s3 = keyboard.nextLine();
        System.out.println("The entered " + s3);
    }
}
```

Sample Screen Output

```
Enter two whole numbers
reported by one or more spaces:
42 10
Next enter two numbers,
A decimal point is OK.
8.99 21
The entered 8.99 and 21.0
Next enter two words:
blatney quipney
The entered "blatney" and "quipney"
Next enter a line of text:
My hair is so long and curly,
My hair is so long and curly.
The entered "My hair is so long and curly."
```

---

---

---

---

---

---

---

---

## Some Scanner Class Methods

- Syntax  
`Int_Variable = Object_Name.nextInt();`  
`Double_Variable = Object_Name.nextDouble();`  
`String_Variable = Object_Name.next();`  
`String_Variable = Object_Name.nextLine();`

---

---

---

---

---

---

---

---

## Scanner Class Methods

- examples

```
int count = keyboard.nextInt();
double distance = keyboard.nextDouble();
String word = keyboard.next();
String wholeLine = keyboard.nextLine();
```

- Remember to prompt the user for input, e.g.

```
System.out.print("Enter an integer: ");
```

---

---

---

---

---

---

---

---

## nextLine() Method Caution

- The `nextLine()` method reads the remainder of the current line, even if it is empty.

---

---

---

---

---

---

---

---

## nextLine() Method Caution, cont.

- example

```
int n;
String s1, s2;
n = keyboard.nextInt();
s1 = keyboard.nextLine();
s2 = keyboard.nextLine();
```

**5440**

**or bust**

**n is set to 5440**

**but s1 is set to the empty string.**

---

---

---

---

---

---

---

---

## The Empty String

- A string can have any number of characters, including zero.
- The string with zero characters is called the *empty* string.
- The empty string is useful and can be created in many ways including  
`String s3 = "";`

---

---

---

---

---

---

---

---

## (optional) Other Input Delimiters

- Almost any combination of characters and strings can be used to separate keyboard input.
- to change the delimiter to `"##"`  
`keyboard2.useDelimiter("##");`
  - whitespace will no longer be a delimiter for `keyboard2` input

---

---

---

---

---

---

---

---

## (optional) Other Input Delimiters, cont.

- class `DelimitersDemo`

```
import java.util.*;
public class DelimitersDemo
{
    public static void main(String[] args)
    {
        Scanner keyboard1 = new Scanner(System.in);
        Scanner keyboard2 = new Scanner(System.in);
        keyboard2.useDelimiter("#");
        //The delimiters for keyboard1 are the whitespace characters.
        //The only delimiter for keyboard2 is #.
        String s1, s2;
        System.out.println("Enter a line of text with two words?");
        s1 = keyboard1.next();
        s2 = keyboard1.next();
        System.out.println("The two words are '" + s1
            + "' and '" + s2 + "'");
        System.out.println("Enter a line of text with two words?");
        System.out.println("delimited by #?");
        s1 = keyboard2.next();
        s2 = keyboard2.next();
        System.out.println("The two words are '" + s1
            + "' and '" + s2 + "'");
    }
}
```

keyboard1 and  
keyboard2 have  
different delimiters

Sample Screen Output

```
Enter a line of text with two words:
funny wop
The two words are "funny" and "wop"

Enter a line of text with two words
delimited by #?
funny wop
The two words are "funny wop" and "op"
```

Display 2.11  
Changing Delimiters (Optional)

---

---

---

---

---

---

---

---

## Documentation and Style: Outline

- Meaningful Names
- Self-Documentation and Comments
- Indentation
- Named Constants

---

---

---

---

---

---

---

---

## Documentation and Style

- Most programs are modified over time to respond to new requirements.
- Programs which are easy to read and understand are easy to modify.
- Even if it will be used only once, you have to read it in order to debug it .

---

---

---

---

---

---

---

---

## Meaningful Names for Variables

- A variable's name should suggest its use.
- Observe conventions in choosing names for variables.
  - Use only letters and digits.
  - "Punctuate" using uppercase letters at word boundaries (e.g. `taxRate`).
  - Start variables with lowercase letters.
  - Start class names with uppercase letters.

---

---

---

---

---

---

---

---

## Documentation and Comments

- The best programs are self-documenting.
  - clean style
  - well-chosen names
- Comments are written into a program as needed explain the program.
  - They are useful to the programmer, but they are ignored by the compiler.

---

---

---

---

---

---

---

---

## Comments

- A comment can begin with `//`.
  - Everything after these symbols and to the end of the line is treated as a comment and is ignored by the compiler.

```
double radius; //in centimeters
```

---

---

---

---

---

---

---

---

## Comments, cont.

- A comment can begin with `/*` and end with `*/`
  - Everything between these symbols is treated as a comment and is ignored by the compiler.

```
/* the simplex method is used to  
calculate the answer*/
```

---

---

---

---

---

---

---

---

## Comments, cont.

- A *javadoc* comment, begins with `/**` and ends with `*/`.
    - It can be extracted automatically from Java software.
- ```
/** method change requires the number of coins to be  
nonnegative */
```

---

---

---

---

---

---

---

---

## When to Use Comments

- Begin each program file with an explanatory comment
  - what the program does
  - the name of the author
  - contact information for the author
  - date of the last modification.
- Provide only those comments which the expected reader of the program file will need in order to understand it.

---

---

---

---

---

---

---

---

## Comments Example

- class `CircleCalculation`

```
import java.util.*;

/**
 * Program to determine area of a circle.
 * Author: Jane M. Prentice
 * E-mail Address: jprentice@unz.ch
 * Programming Language: Java
 * Last Change: October 7, 2006.
 */

public class CircleCalculation {
    public static void main(String[] args) {
        double radius = 2.5; //radius
        double area = 200; //area (inches)
        System.out.println("Enter the radius of a circle in inches:");
        System.out.println("Enter the radius of a circle in inches:");
        radius = Double.parseDouble(args[0]);
        area = 3.14159 * radius * radius;
        System.out.println("A circle of radius " + radius + " inches");
        System.out.println("has an area of " + area + " square inches.");
    }
}
```

```
Sample Screen Output
Enter the radius of a circle in inches:
2.5
A circle of radius 2.5 inches
has an area of 39.269908 square inches.
```

Chapter 214  
Comments and Javadoc

---

---

---

---

---

---

---

---

## Indentation

- Indentation should communicate nesting clearly.
- A good choice is four spaces for each level of indentation.
- Indentation should be consistent.
- Indentation should be used for second and subsequent lines of statements which do not fit on a single line.

---

---

---

---

---

---

---

---

## Indentation, cont.

- Indentation does not change the behavior of the program.
- Improper indentation can miscommunicate the behavior of the program.

---

---

---

---

---

---

---

---

## Named Constants

- To avoid confusion, always name constants (and variables).  
`circumference = PI * radius;`  
is clearer than  
`circumference = 3.14159 * 6.023;`
- Place constants near the beginning of the program.

---

---

---

---

---

---

---

---

## Named Constants, cont.

- Once the value of a constant is set (or changed by an editor), it can be used (or reflected) throughout the program.

```
public static final double INTEREST_RATE = 6.65;
```

- If a literal (such as 6.65) is used instead, every occurrence must be changed, with the risk that another literal with the same value might be changed unintentionally.

---

---

---

---

---

---

---

---

## Declaring Constants

- syntax

```
public static final Variable_Type = Constant;
```

- examples

```
public static final double PI = 3.14159;  
public static final String MOTTO = "The customer is  
always right.";
```

- By convention, uppercase letters are used for constants.

---

---

---

---

---

---

---

---

## Named Constants

- class CircleCalculation2

```
import java.util.*;  
  
/**  
 * Program to determine area of a circle.  
 * Author: Mark D. Programmer  
 * Email Address: jay@cs.berkeley.edu  
 * Programming Assignment 2  
 * Last Update: October 9, 2006.  
 */  
  
public class CircleCalculation2  
{  
    public static final double PI = 3.14159;  
  
    public static void main(String[] args)  
    {  
        double radius; //in inches  
        double area; //in square inches  
        Scanner keyboard = new Scanner(System.in);  
  
        System.out.println("Enter the radius of a circle in inches:");  
        radius = keyboard.nextDouble();  
        area = 2 * radius * radius;  
        System.out.println("A circle of radius " + radius + " inches");  
        System.out.println("has an area of " + area + " square inches.");  
    }  
}
```

```
Sample Screen Output  
Enter the radius of a circle in inches:  
2.5  
A circle of radius 2.5 inches  
has an area of 39.2699 square inches.
```

---

---

---

---

---

---

---

---



## (optional) Graphics Supplement: Outline

- Style Rules Applied to a Graphics Applet
- JOptionPane
- Inputting Numeric Types
- Multi-Line Output Windows

---

---

---

---

---

---

---

---

## Style Rules Applied to a Graphics Applet

- class HappyFace

```
import java.awt.*;
import java.awt.event.*;

public class HappyFace extends JPanel implements ActionListener {
    // Constants for face parts
    private static final int EYE_RADIUS = 10;
    private static final int MOUTH_RADIUS = 10;
    private static final int MOUTH_HEIGHT = 20;
    private static final int MOUTH_WIDTH = 20;
    private static final int MOUTH_OFFSET_X = 20;
    private static final int MOUTH_OFFSET_Y = 10;
    private static final int MOUTH_ANGLE = 180;

    // Constructors
    public HappyFace() {
        setBackground(Color.WHITE);
    }

    public HappyFace(int size) {
        setSize(size, size);
    }

    // Action listener for the smile button
    public void actionPerformed(ActionEvent e) {
        // Change the smile to a frown
        smileToFrown();
    }

    // Change the smile to a frown
    private void smileToFrown() {
        // Change the mouth angle from 180 to 0
        MOUTH_ANGLE = 0;
    }

    // Paint the face
    @Override
    public void paintComponent(Graphics g) {
        super.paintComponent(g);

        // Draw the face
        g.setColor(Color.BLACK);

        // Draw the eyes
        g.drawOval(20, 20, 20, 20);
        g.drawOval(50, 20, 20, 20);

        // Draw the mouth
        g.drawArc(40, 50, 20, 20, MOUTH_ANGLE, MOUTH_ANGLE);
    }
}
```

---

---

---

---

---

---

---

---

## Style Rules Applied to a Graphics Applet, cont.

- Named constants makes it easier to find values.
- Comments and named constants make changing the code much easier.
- Named constants protect against changing the wrong value.

---

---

---

---

---

---

---

---


## JOptionPane

### class JOptionPaneDemo

```
import javax.swing.*;

public class JOptionPaneDemo {
    public static void main(String[] args) {
        JOptionPane.showMessageDialog(
            null, "Enter number of apples:", "Input",
            JOptionPane.INFORMATION_MESSAGE);
        String appleString = JOptionPane.showInputDialog("Enter number of apples?");
        int appleCount = Integer.parseInt(appleString);

        JOptionPane.showMessageDialog(
            null, "Enter number of oranges:", "Input",
            JOptionPane.INFORMATION_MESSAGE);
        String orangeString = JOptionPane.showInputDialog("Enter number of oranges?");
        int orangeCount = Integer.parseInt(orangeString);
        int totalFruitCount = appleCount + orangeCount;
        JOptionPane.showMessageDialog(
            null, "The total number of fruits = " + totalFruitCount,
            "Message", JOptionPane.INFORMATION_MESSAGE);
    }
}
```



---

---

---

---

---

---

---

---

## JOptionPane, cont.

- **JOptionPane** can be used to construct windows that **interact with the user**.
- The **JOptionPane** class is imported by `import javax.swing.*;`
- The **JOptionPane** class produces windows for obtaining input or displaying output.

---

---

---

---

---

---

---

---

## JOptionPane, cont.

- Use `showInputDialog()` for input .
- Only string values can be input.
- To convert an input value from a string to an integer use the `parseInt()` method from the `Integer` class, use `appleCount = Integer.parseInt(appleString);`

---

---

---

---

---

---

---

---

## JOptionPane, cont.

- Output is displayed using the `showMessageDialog` method.

```
JOptionPane.showMessageDialog(null, "The total number  
of fruits = " + totalFruitCount);
```

---

---

---

---

---

---

---

---

## JOptionPane, cont.

- syntax

- input

```
String Variable = JOptionPane.showInputDialog  
(String Expression);
```

- output

```
JOptionPane.showMessageDialog(null,  
String Expression);
```

- `System.exit(0)` ends the program.

---

---

---

---

---

---

---

---

## JOptionPane Cautions

- If the input is not in the correct format, the program will *crash*.
- If you omit the last line (`System.exit(0)`), the program will not end, even when the OK button in the output window is clicked.
- Always label any output.

---

---

---

---

---

---

---

---

## Inputting Numeric Types

- `JOptionPane.showInputDialog` can be used to input any of the numeric types.
  - Simply convert the input string to the appropriate numeric type.

| Type Name           | Method for Converting                                 |
|---------------------|-------------------------------------------------------|
| <code>byte</code>   | <code>Byte.parseByte(String, Jc_Converter)</code>     |
| <code>short</code>  | <code>Short.parseShort(String, Jc_Converter)</code>   |
| <code>int</code>    | <code>Integer.parseInt(String, Jc_Converter)</code>   |
| <code>long</code>   | <code>Long.parseLong(String, Jc_Converter)</code>     |
| <code>Float</code>  | <code>Float.parseFloat(String, Jc_Converter)</code>   |
| <code>double</code> | <code>Double.parseDouble(String, Jc_Converter)</code> |

To convert a value of type `String` to a value of the type given in the first column, use the method given in the second column. Each of the methods in the second column returns a value of the type given in the first column. The `String, Jc_Converter` must be a correct string representation of a value of the type given in the first column. For example, to convert the string `"123.456"` to a `double`, use `Double.parseDouble("123.456", Jc_Converter)`. The `String, Jc_Converter` must be a whole number (in the range of the type) that is within the usual way without any decimal points.

Display 2.18  
Methods for Converting Strings to Numbers

---

---

---

---

---

---

---

---

---

---

---

---

## Multi-Line Output Windows

- To output multiple lines using the method `JOptionPane.showMessageDialog`, insert the new line character `\n` into the string used as the second argument.

```

OptionPane.showMessageDialog(null,
    "The number of apples\n" +
    "plus the number of oranges\n" +
    "is equal to " + totalFruit);
    
```

---

---

---

---

---

---

---

---


---

---

---

---

## Multi-Line Output Windows, cont.



Display 2.19  
A Multiline Output Window

---

---

---

---

---

---

---

---

---

---

---

---

## Programming Example

### class ChangeMakerWindow

```
import javax.swing.*;

public class ChangeMakerWindow
{
    public static void main(String[] args)
    {
        String amountString =
            JOptionPane.showInputDialog(
                "Enter a whole number from 1 to 99. Use
                * to fill in with a combination of coins"
                + "that equals that amount of change.");

        int amount = Integer.parseInt(amountString);
        int[] coins = {25, 10, 5};
        amount = amount / 100;
        amount = amount * 100;
        int[] quarters = new int[amount / 25];
        int[] dimes = new int[amount / 10];
        int[] nickels = new int[amount / 5];
        int[] pennies = new int[amount];

        JOptionPane.showMessageDialog(
            null,
            "87 cents in coins can be given as:
            * quarters = " + quarters[0]
            + " dimes = " + dimes[0]
            + " nickels = " + nickels[0]
            + " pennies = " + pennies[0]);
    }
}
```

---

---

---

---

---


---

---


---

## Programming Example, cont.

Input Window



Output Window



Display 2.20

Change Program v-0.0.0 Windows

---

---

---

---

---

---

---

---

## Summary

- You have become familiar with Java primitive types (numbers, characters, etc.).
- You have learned about assignment statements and expressions.
- You have learned about stings.
- You have become familiar with classes, methods, and objects.

---

---

---

---

---

---

---

---

## Summary, cont.

- You have learned about simple keyboard input and screen output.
- (optional) You have learned about windows-based input and output using the JOptionPane class.

---

---

---

---

---

---

---

---